


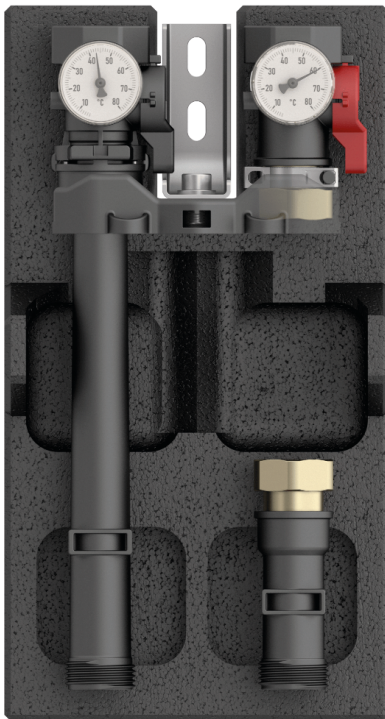

Heating pump assembly

Part no. 77335

Heating pump assembly

benefits

- pre-assembled, tightness-tested and heat-insulated assembly
- modular system with flow at left or right
- easy, fast mounting
- with high-efficiency pump class A
- eligible for heating optimization program (BAFA)



Application

Heating pump assembly for use in non-mixed heating circuits, specially for storage tank charging. It connects the heating boiler and the pipe system.

Description

Complete, pre-assembled and tightness-tested heating pump assembly made of high-grade polymer material with all required functional components, form-fit heat insulation and wall mounting unit.

The flow line consists of:

- Shut-off valve with thermometer holder (red handle)
- Thermometer flow (5 to 80 °C)
- Plastic pipe for length compensation
- Suitable for circulation pumps DN 20 with G1 x 130 mm

The return line consists of:

- Shut-off valve with thermometer holder (black handle)
- Thermometer return (5 to 80 °C)
- Gravity brake
- Plastic pipe for length compensation pump / mixer

Technical Specifications

Axis distance

90 mm

system connections

Boiler: G1 male

Heating circuit: G1 female

Operating temperature range

Medium: max. 60 °C at 6 bar,

max. 70 °C at 5 bar,

max. 90 °C at 3 bar

Nominal size

DN 20

Flow coefficient Kvs

5.7 m³/h

Heat insulation

Polypropylene EPP

Dimensions

W x H x D: 189 x 335 x 240 mm

Proportional pressure control

0

Constant pressure control


0

Fixed speed of rotation

0

Technical Drawings

PrimoTherm® C 130-1 with AFRISO pump

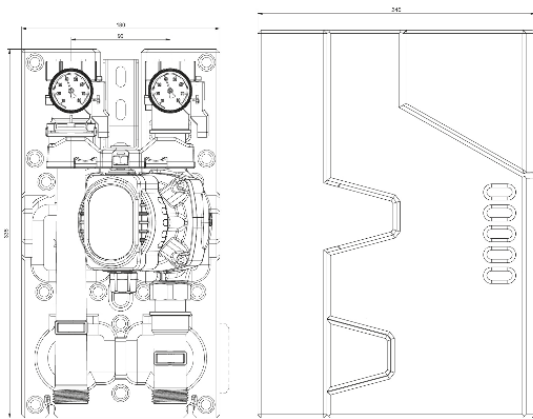

Dimensions (mm)

Versions

	opening temperature is reached	Pump	Part no.
Heating pump assembly		●	77335

● in-stock items

● Non-stock items