


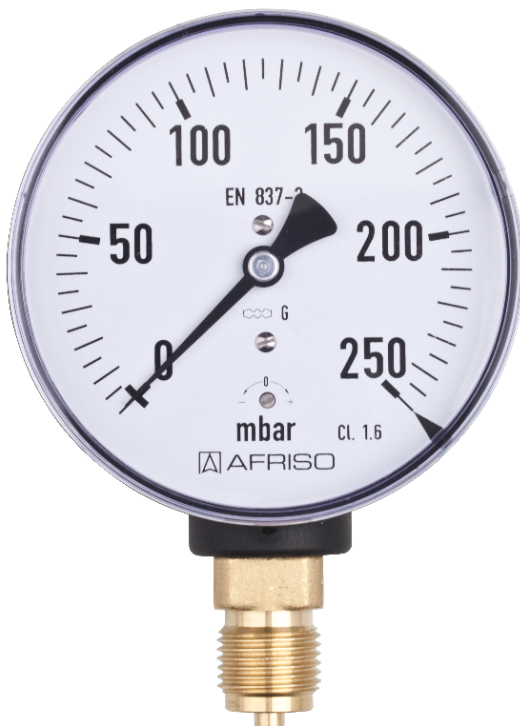

Standard capsule pressure gauge type D2

housing $\varnothing$ (nominal size)	100 mm
Connection	G $\frac{1}{2}$ B
alignment	bottom
accuracy class	1.6
standard	EN 837-3

benefits

- with zero correction
- ideal for low pressure ranges
- GOSSTANDART-certified

Application

For gaseous, dry media which do not attack copper alloys.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type

D2

Nominal size

100

accuracy class (EN 837-3/6)

1.6

ranges (EN 837-3/5)

see ordering table

application area

static load: Full scale value

dynamic load: 0.9 x full scale value

overload safety: 1.3 x full scale value

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. $\pm 0.6 \text{ } \%/10 \text{ K}$

falling temperature approx. $\pm 0.6 \text{ } \%/10 \text{ K}$

of full scale value

Degree of protection

NG 100

IP 44 (EN 60529)

Connection

Brass, bottom

Measuring element

Capsule element, CuBe alloy

movement

Brass

Zero correction
from the front

Seal
NBR (Perbunan)

Dial
Aluminium, white
Scaling: black

Options

- back flange
- 3-hole fixing, panel mounting bezel
- Measuring system stainless steel (NG 100)
- throttle screw
- Reference pointer
- special scales
- other process connections


Pointer
Aluminium, black

Housing
Sheet steel, black

window
Plastic, clipped in

Technical Drawings

Bottom connection

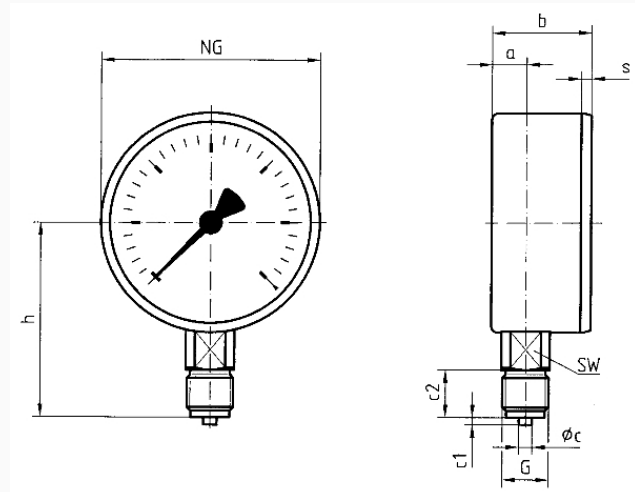

Dimensions (mm)

NG	a	b	øc	c1	c2	G	h	s	SW
63	9,5	33,7	5	2	13	G¼B	52,7	3,7	14
80	14,8	43,3	6	3	20	G½B	69	3,8	22
100	15,6	44	6	3	20	G½B	87	3,5	22

Versions

Range	Mounting type	Type		Part number
-25/+0 mbar	direct	KP100 D201	●	35104201
-40/+0 mbar	direct	KP100 D201	●	35105201
-60/+0 mbar	direct	KP100 D201	●	35106201
-100/+0 mbar	direct	KP100 D201	●	35107201
-160/+0 mbar	direct	KP100 D201	●	35108201
-250/+0 mbar	direct	KP100 D201	●	35109201
-400/+0 mbar	direct	KP100 D201	●	35110201
-600/+0 mbar	direct	KP100 D201	●	35111201
-1000/+0 mbar	direct	KP100 D201	●	35112201
0/25 mbar	direct	KP100 D201	●	35116201
0/40 mbar	direct	KP100 D201	●	35117201
0/60 mbar	direct	KP100 D201	●	35118201
0/100 mbar	direct	KP100 D201	●	35119201
0/160 mbar	direct	KP100 D201	●	35120201
0/250 mbar	direct	KP100 D201	●	35121201
0/400 mbar	direct	KP100 D201	●	35122201
0/600 mbar	direct	KP100 D201	●	35123201
0/1000 mbar	direct	KP100 D201	●	35124201

- in-stock items
- Non-stock items