



Capsule pressure gauge for chemical applications type D4

housing $\varnothing$ (nominal size)	100 mm
Connection	G $\frac{1}{2}$ B
alignment	bottom
accuracy class	1.6
standard	EN 837-3

benefits

- with zero correction
- robust stainless steel housing (with bayonet bezel)
- wetted parts and movement made of stainless steel
- GOSSTANDART-certified
- Ex version (optional)

Application

For corrosive gaseous and dry media, also for use in corrosive environments.

Technical Specifications

Type

D4

Nominal size

100

accuracy class (EN 837-3/6)

1.6

ranges (EN 837-3/5)

see ordering table

application area

static load: Full scale value

dynamic load: 0.9 x full scale value

overload safety: 1.3 x full scale value

Operating temperature range

Medium: max. 100 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. $\pm 0.6 \text{ } \%/10 \text{ K}$

falling temperature approx. $\pm 0.6 \text{ } \%/10 \text{ K}$

of full scale value

Degree of protection

IP 32 (EN 60529)

Connection

stainless steel 316 Ti/316 L, bottom

Measuring element

Capsule element, stainless steel 316 Ti/316 L

movement

Stainless steel

Zero correction

from the front

Seal
FKM (Viton)

Dial
Aluminium, white
Scaling: black

Pointer
Aluminium, black

Housing
Stainless steel 304

bayonet bezel
Stainless steel 304


window
D402
Laminated safety glass

Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- Ex version
- throttle screw
- special scales
- other process connections

Technical Drawings

Bottom connection

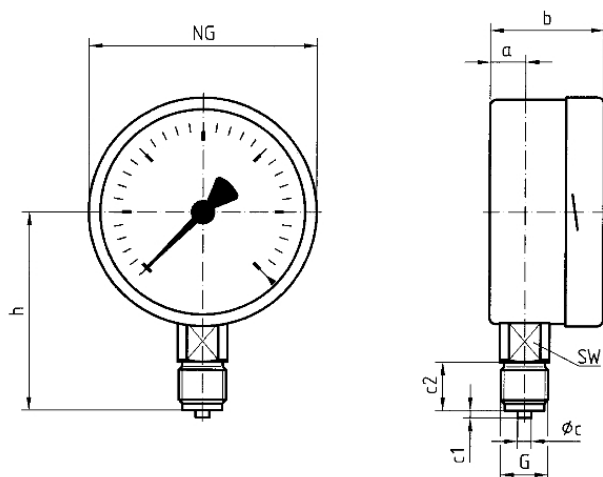

Dimensions (mm)

NG	a	b	Øc	c1	c2	G	h	SW
63	10,8	40	5	2	13	G $\frac{1}{4}$ B	53	14
100	15,6	49	6	3	20	G $\frac{1}{2}$ B	86	22
160	17,5	50	6	3	20	G $\frac{1}{2}$ B	116	22

Versions

Range	Mounting type	Type		Part number
-25/+0 mbar	direct	KP100Ch D402	●	35104402
-40/+0 mbar	direct	KP100Ch D402	●	35105402
-60/+0 mbar	direct	KP100Ch D402	●	35106402
-100/+0 mbar	direct	KP100Ch D402	●	35107402
-160/+0 mbar	direct	KP100Ch D402	●	35108402
-250/+0 mbar	direct	KP100Ch D402	●	35109402
-400/+0 mbar	direct	KP100Ch D402	●	35110402
-600/+0 mbar	direct	KP100Ch D402	●	35111402
-1000/+0 mbar	direct	KP100Ch D402	●	35112402
0/25 mbar	direct	KP100Ch D402	●	35116402
0/40 mbar	direct	KP100Ch D402	●	35117402
0/60 mbar	direct	KP100Ch D402	●	35118402
0/100 mbar	direct	KP100Ch D402	●	35119402
0/160 mbar	direct	KP100Ch D402	●	35120402
0/250 mbar	direct	KP100Ch D402	●	35121402
0/400 mbar	direct	KP100Ch D402	●	35122402
0/600 mbar	direct	KP100Ch D402	●	35123402
0/1000 mbar	direct	KP100Ch D402	●	35124402

- in-stock items
- Non-stock items