



Pressure transducers DeltaFox DMU 20 D

Part no. 33409R010541

Pressure transducer version for differential pressure measurement

benefits

- multiple-range transmitter with up to 3 switchable measuring ranges
- easy parameterisation via 2-line LC display
- Min./Max. value indication
- ideal for clean room and filter monitoring

Application

The differential pressure transducer DMU 20 D can be used with all dry, gaseous, non-corrosive media. The device detects even smallest differential pressures and is particularly suitable for heating, air conditioning and ventilation applications. Clean rooms and filter monitoring are other application areas.

Description

The devices equipped with silicon sensors. When pressure is applied, the pressure difference between the positive side and the negative side is converted into a current and voltage signal which is proportional to the differential pressure. The 2-line LC display shows the measured value and the unit and optionally the status of the switching outputs. The customer can parameterise up to three measuring ranges.

Technical Specifications

Measuring accuracy

Deviation from the characteristic curve according to IEC 60770 – limit point calibration (non-linearity, hysteresis, repeatability)

< 0/6 mbar

$\leq \pm 1 \% \text{ FSO (BFSL)}$

Display

2-line LC display,

visible area 32.5 x 22.5 mm,

5-digit 7-segment main display,

Character height 8 mm,

range $\pm 9,999$,

8-digit 14-segment additional display,

height 5 mm, 52-segment bar chart,

accuracy 0.1 % ± 1 digit,

pressure units switchable mbar, bar, Pa, hPa, kPa, psi, Atm, torr, mmHg

Measuring range

0/4 mbar

Long-term stability

< 0/6 mbar

$\leq \pm 0.5 \% \text{ FSO/year}$

Operating temperature range

Medium: 0/50 °C

Ambient: 0/50 °C

Storage: -10/+70 °C

Housing

W x H x D: 132 x 68.5 x 50 mm

Process connection

hose olive $\varnothing$ 6.6 x 11 mm (for flexible hoses with ID 6 mm)

material

Housing: Plastic (ABS)

Process/pressure connection: Brass, nickel-plated

Sensor: Ceramic, Silicone, epoxy, RTV

wetted parts

pressure connection, PVC/silicone hose, Sensor

Supply voltage
DC 19 – 32 V

Output signal
3-wire, 0/4–20 mA and 0–10 (5) V

Load
0/4–20 mA: $R_{max} = 330 \, \Omega$
0–10 V: $R_{min} = 10 \, k\Omega$

electrical protection
short circuit proof and protected against reverse polarity

Options


- other process connections
- other output signals

Electrical connection
Cable gland M16 x 1.5

Degree of protection
IP 54 (EN 60529)

CE conformity
EMC Directive 2014/30/EU
RoHS Directive 2011/65/EU

Technical Drawings

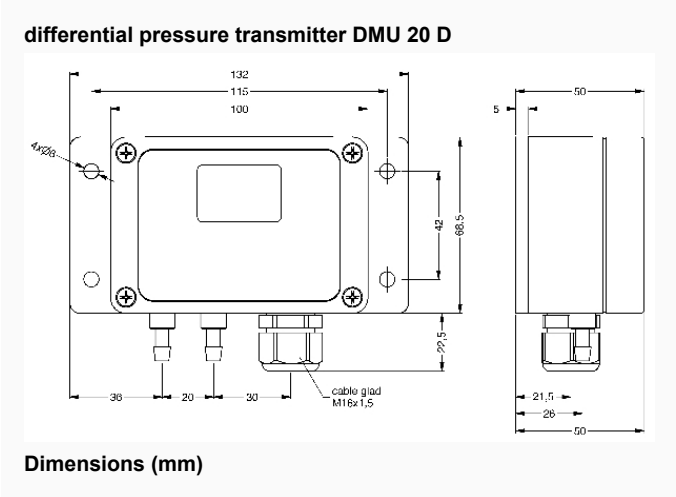

Versions

	Process/pressure connection	switchable measuring ranges			static pressure	Part no.
		I	II	III		
Pressure transducers DeltaFox DMU 20 D	hose olive $\varnothing$ 6.6 x 11 mm	0/4 mbar	0/2.5 mbar		max. 200 mbar	33409R010541

- in-stock items
- Non-stock items