


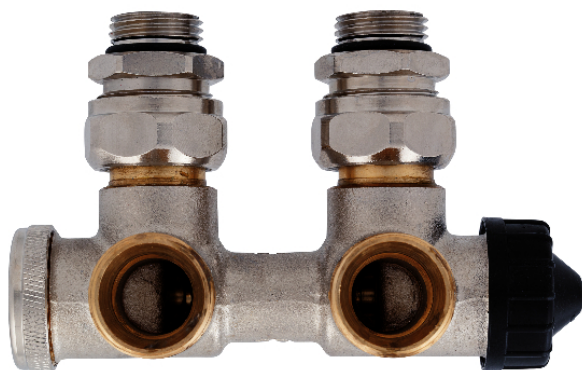

thermostat combination block Vario THK M E G $\frac{1}{2}$ AG

Part no. 221 225.101

thermostat combination block

benefits

- fully adjustable
- valve insert can be replaced without system having to be drained
- various versions and sizes for virtually any application

Application


Suitable for medium water volumes. For mounting to compact or bathroom radiators with centre connection in dual-pipe heating systems. Also for installations with copper pipes.

Description

Low-noise thermostat combination block with threaded connection M 30 x 1.5 mm for thermostat control heads and actuators. Mounting cap with valve shut-off function. Fully adjustable with ES-SV adjustment key. Valve spindle with double O ring seal.

Technical Drawings

Vario THK M, angled – version G $\frac{1}{2}$ male thread

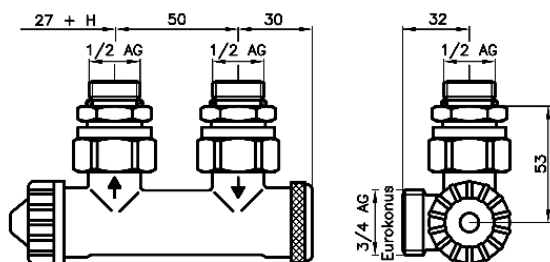

Dimensions (mm)

Versions

			Version	Nominal diameter	Conne- tion	Conne- tion	Flow co- efficient*	Flow co- efficient Kvs**		Part no.
					to radia- tor	to pipe				
Vario THK M	for medi- um water volumes	Angled	DN 15	G½ male	G¾ male eurocone	0.038 – 0.46 m³/h	0.68 m³/h			221 225.101

-  in-stock items
-  Non-stock items