

Standard Bourdon tube pressure gauges RF80

Part no. 85164101

Standard Bourdon tube pressure gauges Type D1

benefits

- for pneumatic and heating system applications
- Design as per EN 837-1
- Accuracy class 1.6
- corrosion-resistant, highly impact-resistant plastic housing
- many customised versions available

Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys.
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type
D1

Nominal size
80

accuracy class (EN 837-1/6)
1.6

ranges (EN 837-1/5)
see ordering table

application area
static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{3}{5}$ x full scale value
short-term: Full scale value

Operating temperature range
Medium: max. 60 °C
Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. $\pm 0.4\% / 10\text{ K}$
falling temperature approx. $\pm 0.4\% / 10\text{ K}$
of full scale value

Degree of protection
IP 32 (EN 60529)

Connection
Brass, bottom

Measuring element
Bourdon tube, Copper alloy
≤ 60 bar: "C" type tube
> 60 bar: helical tube

movement
Brass

Dial

Plastic, white
Scaling: black

Pointer

Plastic, black

Housing

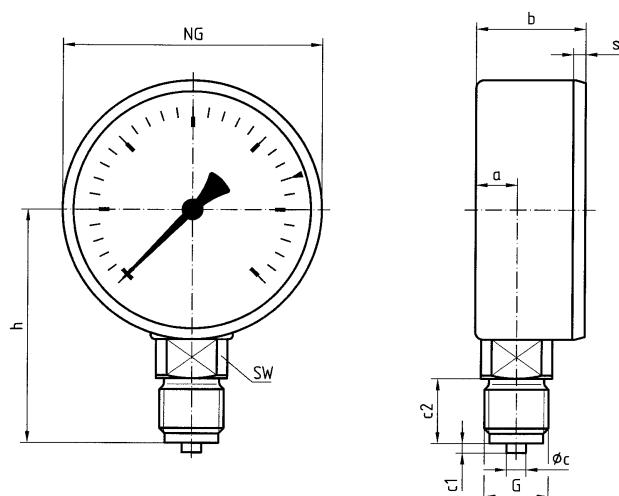
ABS, black, highly impact-resistant and corrosion-resistant

window

Plastic, clipped in
NG 80
with adjustable red reference pointer

Options

- throttle screw
- Reference pointer
- special scales
- other process connections

Technical Drawings
NG 80 – bottom connection

Dimensions (mm)

NG	a	b	Øc	c1	c2	G	h	s	SW
80	12,8	32,8	6	3	20	G 1/4 B	72	2,8	22

Versions

Range	Mounting type	Type	Part number
0/6 bar	direct	RF80 D101	85164101

 in-stock items

 Non-stock items