



Hydrometers HY 100

Part no. 63286

Hydrometers HY for heating/plumbing

Technical Specifications

Nominal size

100

accuracy class (EN 837-1/6)

2.5

ranges

0/6 bar

application area

static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{2}{3}$ x full scale value
short-term: Full scale value

Operating temperature range

Medium: max. 60 °C
Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. $\pm 0.4 \%$ /10 K
falling temperature approx. $\pm 0.4 \%$ /10 K
of full scale value

Degree of protection

IP 32 (EN 60529)

Connection

Brass, bottom
NG 100
G $\frac{1}{2}$ B

Measuring element

Bourdon tube, "C" type tube
Copper alloy

movement

Brass

Dial

Plastic, white
dual scale bar outer - mWC inner
Scaling: black

Pointer

Plastic, black


Housing

Plastic (ABS), black, highly impact-resistant and corrosion-resistant

window

Plastic, clipped in
with adjustable red reference pointer

Technical Drawings

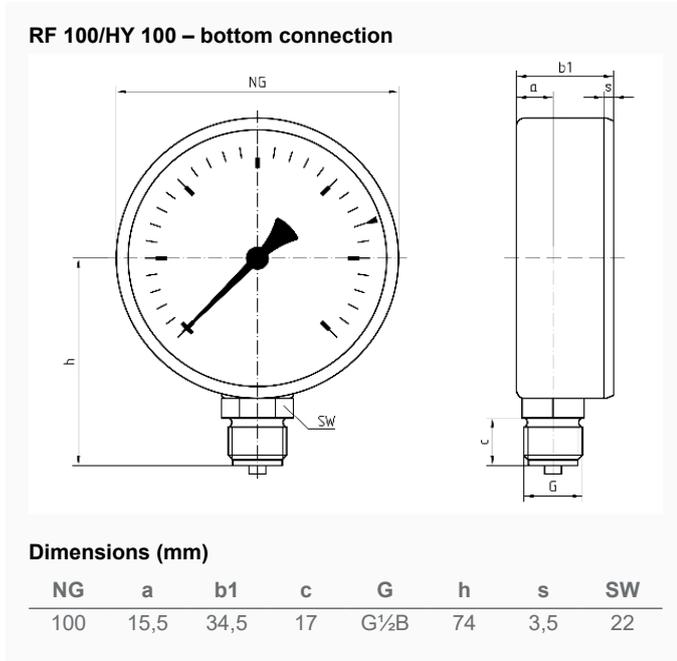

Versions

| | housing ø | Conne- tion | Conne- tion | Thread | alignment | Range | Type | Part no. |
|--------|-----------|----------------|----------------|--------|-----------|---------|--------|----------|
| HY 100 | 100 mm | G½B | | | bottom | 0/6 bar | HY 100 | ● 63286 |

- in-stock items
- Non-stock items