



Safety temperature cut outs STB LS1/971 FU

Part no. 67585X

Safety temperature cut outs STB With capillary tube

benefits

- ideal for heating and process industries
- for protection against exceeding the maximum temperature
- no external power supply
- manual reset

Application

There are many application areas for safety temperature cut outs in the heating and process industries. In conventional oil-fired or gas-fired boilers, these devices are used to monitor the boiler water. The safety temperature cut outs feature a manual reset button which must be actuated for unlocking.

Description

If the temperature at the probe increases, the measuring liquid in the measuring system expands. If the temperature exceeds a critical value, the device triggers, the voltage-free contact switches and the system is set to a defined safe state. When the temperature has decreased by approx. 15 K, the device can be unlocked and the system resumes operation.

Technical Specifications

Type

LS1

Switching point

see ordering table

Tolerance

+0 K/-6 K at 20 °C

Influence of ambient temperature

0.25 °C/°C

Switching differential

$\Delta T 15 \pm 8 K$

Fail safe

1

Probe

Copper

Ø 6.5 x 95 mm

Probe element

liquid-filled

Operating temperature range

Probe: max. 125 °C

Housing: max. 85 °C

Capillary tube

Cu capillary tube with PVC coating, black
Length: 1500 mm

Degree of protection

IP 00 (EN 60529)

Time constant

DIN-tested

DIN EN 14597:2012-09

registration number: TR/STB 1211

Options

- other operating ranges
- other capillary tube lengths
- customised versions

electrical switching contact

Changeover contact


Contact rating

NC: AC 250 V, 16 (2.5) A

NO: AC 250 V, 0.5 A

Technical Drawings

STB - housing dimensions

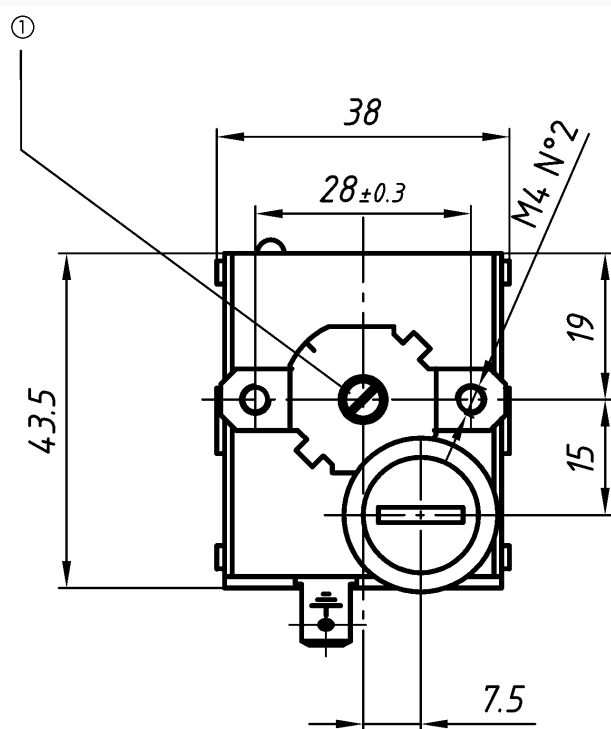

Dimensions (in mm)
Sealing wax

Versions

	Contact	Switching point	Switching point	capillary length		Part no.
Safety tempera- ture cut outs STB LS1/971 FU	Changeover con- tact	75 °C		1500 mm		67585X

-  in-stock items
-  Non-stock items